

UV-C Sterilon Clean Air Disinfection Unit

Characteristics:

Flow luminaires emitting ultraviolet (UV-C) light are one of the most effective devices capable of removing viruses, bacteria, mold from the surface or destroying the DNA or RNA of any exposed microorganisms. **One-pass dose from 90 J / m² to 100 J / m².**


- Air-flow disinfection function
- Type of light: UV-C ultraviolet
- Steel body, powder-coated in white-black or black
- Light source lifespan: 9000 h
- Possibility to reset the operating time counter
- The luminaire is equipped with a LED operating time counter used for indicating the consumption of UV-C fluorescent lamps
- Air-flows and volume levels:
UV-C Sterilon Clean- min.350-max. 700 [m³/h]; min. <38 - max. 46dB

Technical Features:

- Light source lifespan: 9000 h
- UV-C Wavelength: 253.7 nm
- Supply voltage: 220-240V
- Class of protection against electric shock: I
- Ingress protection class: IP20
- Power cord: 1.5m
- The luminaire is equipped with a LED operating time counter used for indicating the consumption of UV-C fluorescent lamps
- Air-flows and volume levels:
UV-C Sterilon Clean - min 350 - max. 700 [m³ / h]; min. <38 - max. 46dB

Application:

Luminaires are recommended for use in large service-providing facilities (hair and beauty salons), health care facilities, hotels, restaurants, public administration, educational and care facilities.

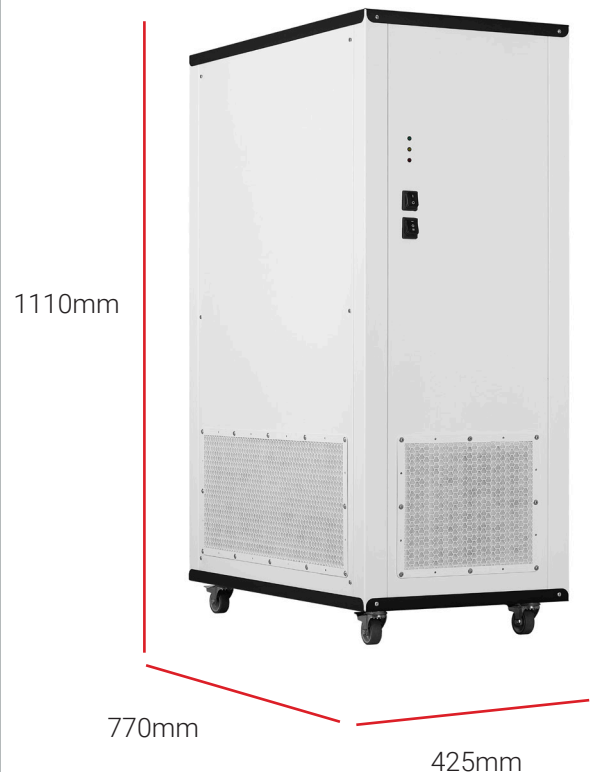

CE
CE Certified

This product has been independently tested and certified by Polish Institute of Hygiene. (PZH)

Contact :